

INDUSTRIAL TUMBLE DRYER

T
RANGE

T9 HP	T11 HP	T13 HP	T16 HP
9KG 53LB	11KG 77LB	13KG 53LB	16KG 77LB




FEATURES

- Heat pump
- Standard stainless steel drum with large diameter
- Easy-to-use microprocessor (ECT)
- Combination of Radial and Axial airflow - RADAX® concept:
 - maximal heat transfer
 - low energy consumption
 - short drying time
- Large door opening for easy loading and unloading
- Self cleaning lint screen

OPTIONS

- Coin operated version
- Reversing drum
- Full Control programmer (FCT)
- Residual moisture control Sensodry®:
 - safe drying of delicate linen
 - humidity detection in %
 - ideal in combination with SoftWash®
 - ideal for dry cleaners, fire depts
 - available on Easy and Full Control
- Stainless steel front



STANDARD
STAINLESS STEEL
DRUM



HEAT PUMP




ENERGY
EFFICIENT

TYPE		T9 HP	T11 HP	T13 HP	T16 HP
CAPACITY					
Drum capacity	kg/lb	9/20	11/24	13/27	16/35
Drum volume	l	190	250	285	345
Drum diameter	mm	Ø 760	Ø 760	Ø 760	Ø 760
DRYING AVERAGE	g/min	122	126	120	120
MOTORS					
Fan	kW	0,30	0,30	0,30	0,30
Drive	kW	0,18	0,25	0,25	0,25
HEAT PUMP					
Electrical connection		3 x 208-240V 50HZ / 3x380-415V 50Hz +N / 3 x 440V 60Hz			
Energy	kW	2,9	2,9	2,9	2,9
PROGRAMMER					
Easy control - antivandal (ECT)		Standard	Standard	Standard	Standard
Full control (FCT)		Available	Available	Available	Available
DIMENSIONS					
H×W×D	mm	1465x795x1275	1680x795x1525	1680x795x1615	1680x795x1735
Net weight	kg	290	350	360	375
TRANSPORT DATA					
Packed H×W×D	mm	1570×880×1335	1785×855×1540	1785×855×1635	1785×855×1750
Gross weight	kg	305	385	400	400



Energy consumption comparison - conventional dryer vs. heat pump dryer

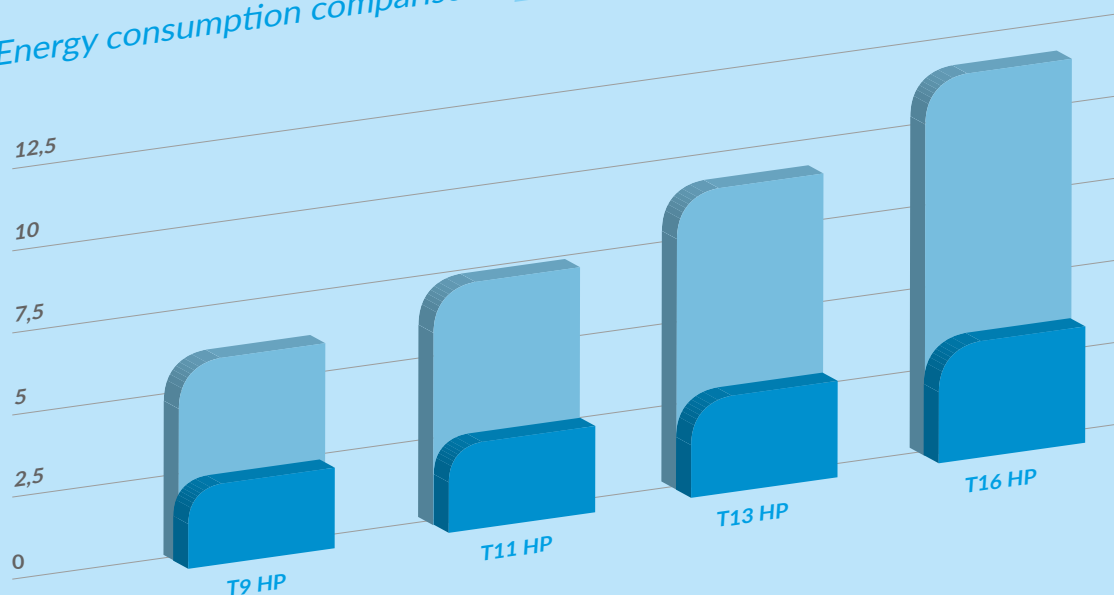

WATCH THE T HP VIDEO

www.bit.ly/videoevo4



The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

Primus by Alliance Laundry Systems

